


**H-SERIES – Variable Frequency Drive
 WATER-COOLED* TWO STAGE**

Dimensions and Specifications

Typical, Do not use for construction. (Drawings are provided with order acknowledgement)

Model	Motor HP	Max. Pressure** PSIG	Free Air Delivery CFM	Length In.	Width In.	Height In.	Net Weight Lbs.
KNW00-AX	30	125	60-75	85	36	61	2515
KNW00-BX	40	125	60-95	85	36	61	2535
KNW00-CX	50	125	100-127	85	36	61	2535
KNW00-DX	60	125	100-167	85	36	61	2650
KNW0-AX	60	150	130-172	94	49	54	3350
KNW0-BX	75	150	130-223	94	49	54	3550
KNW0-CX	100	150	130-292	94	49	54	3550
KNW0-DX	100	135	130-331	94	49	54	3600
KNW0-EX	125	135	130-400	94	49	54	3800
KNW1-AX	125	150	310-413	119	63	60	5580
KNW1-BX	150	150	310-504	119	63	60	5800
KNW1-CX	150	150	310-534	119	63	60	5850
KNW1-DX	200	150	310-618	119	63	60	6150
KNW1-EX	200	150	310-653	119	63	60	6200
KNW1-FX	200	135	310-728	119	63	60	6400
KNW1-GX	250	135	310-818	119	63	60	6450
KNW2-AX	250	150	560-915	CF	CF	CF	9950
KNW2-BX	300	150	560-1102	CF	CF	CF	10100
KNW2-CX	350	150	560-1316	CF	CF	CF	10800
KNW2-DX	400	135	560-1559	CF	CF	CF	11400
KNW3-AX	450	125	1237-1765	CF	CF	CF	13700
KNW3-BX	500	125	1237-1936	CF	CF	CF	14100
KNW3-CX	550	125	1237-2155	CF	CF	CF	14500
KNW3-DX	600	115	1237-2380	CF	CF	CF	14900

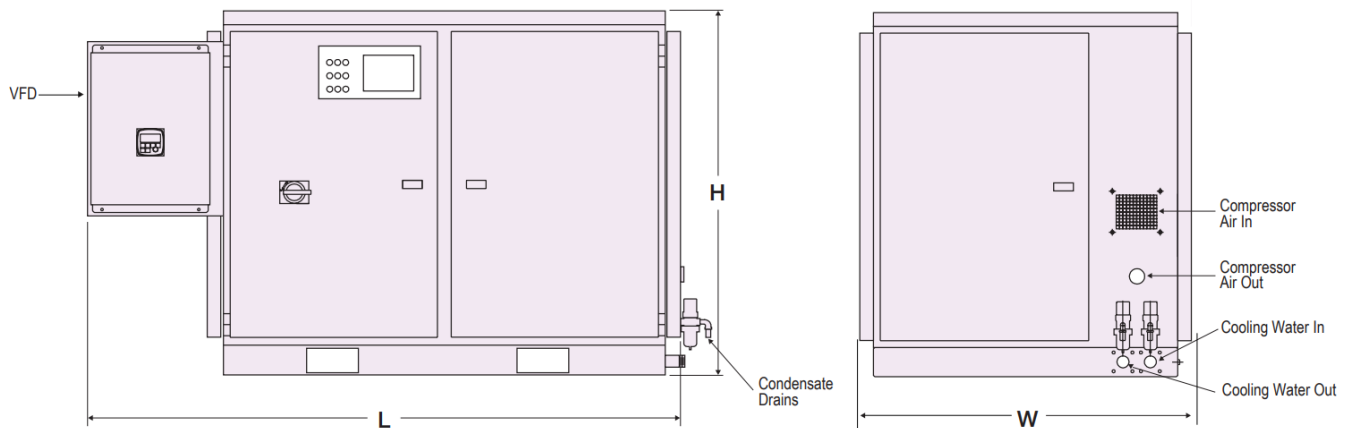

*For water-cooled requirements, refer to bulletin KNWAL & KNWAH

** Capacity at 125 PSIG